

nuudo.

Arcano

# Create emotions with lighting

## nuudo.

nuudo. een merk dat ontstaan is uit passie voor hoogwaardig afgewerkte producten in combinatie met innovatieve oplossingen om een perfect lichtbeeld te creëren.

Met het oog van een vakman en het hart van een vormgever worden de armaturen van nuudo. ontworpen door ons internationale designteam.

Design, engineering en eindproductie vindt plaats in onze eigen atelier in Nederland, waardoor wij de hoogste kwaliteit kunnen waarborgen.

Unieke details, veelzijdigheid in samenstellingen en trends in vormgeving maken nuudo. de perfecte partner voor een ieder die deze passie deelt.

Alleen samen kunnen we emotie met licht creëren.

nuudo.

nuudo. a brand created out of passion for high-quality finished products with innovative solutions to create a perfect light image.

With the eye of a professional and the heart of a designer, the luminaires of nuudo. are designed by our international design team.

Design, engineering and final production takes place in our own workshop in the Netherlands, so that we can guarantee the highest quality.

Unique details, versatility in compositions and trends in design make nuudo. the perfect partner for everyone who shares this passion.

Only together can we create emotion with light.

nuudo.

# Arcano

MODULAR PERFECTION

De Arcano serie is een modulair 48V DC systeem met stuk voor stuk krachtig design. Door de brede opzet van mogelijkheden, rails in inbouw, opbouw en pendel zijn deze toepasbaar in elke ruimte. De Arcano zorgt met het design en veelzijdigheid dat licht in elke ruimte tot zijn recht komt.

The Arcano is a modular 48V DC track system in black and white. You can get the track as a built-in, surface-mounted and suspended version. Anywhere in the track, various products can be placed. We have downlights for direct light, downlights opal for general lighting, directional spotlights in different sizes and light outputs and we have pendant luminaires in the shape of a tube and a sphere, the sphere version can be tilted.

The system is suitable for retail, hospitality and residential or office environments where a home-ly/welcoming feeling is important.








# Versatility with light



# Arcano


## SURFACE MOUNTED TRACK

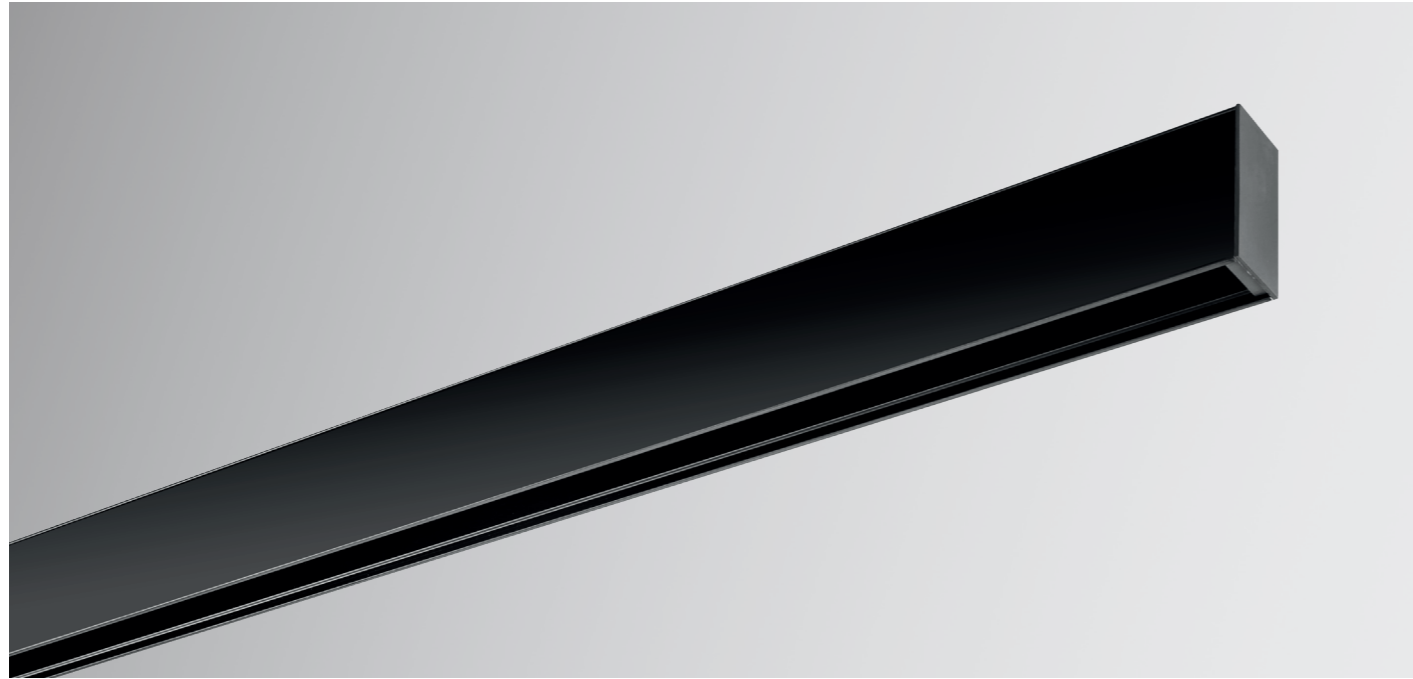


### Product information

Input voltage	DC48V
Max. load	up to 600W
Max. track length	up to 20m
Track sections	1m / 2m / 3m
Available color	White / Black
Certification	CE / ROHS

### Dimensions

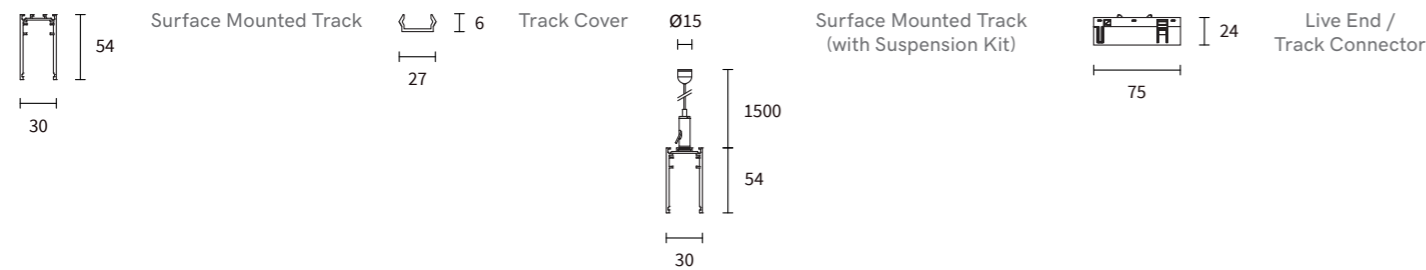

### Track Accessories | Available for surface mounted track

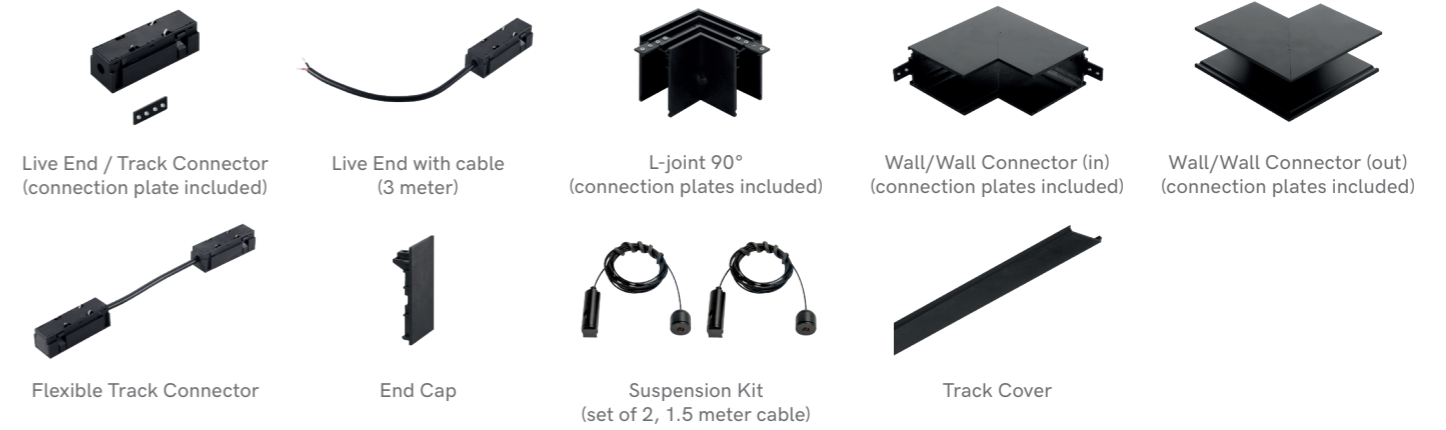

### Track

Article No.	Product Name	Color	Voltage	Length
1.09.0032	Arcano Surface Mounted Track	White	DC48V	1 meter
1.09.0033	Arcano Surface Mounted Track	Black	DC48V	1 meter
1.09.0034	Arcano Surface Mounted Track	White	DC48V	2 meter
1.09.0035	Arcano Surface Mounted Track	Black	DC48V	2 meter
1.09.0036	Arcano Surface Mounted Track	White	DC48V	3 meter
1.09.0037	Arcano Surface Mounted Track	Black	DC48V	3 meter


### Track Accessories

Article No.	Product Name	Color	Length
1.01.0262	Live end / Track Connector (connection plate included)	Black	
1.01.0263	Live end with cable	Black	3 meter
1.01.0256	L-joint 90° for Arcano Surface Mounted Track	White	
1.01.0257	L-joint 90° for Arcano Surface Mounted Track	Black	
1.01.0258	Wall/Wall Connector (in) for Arcano Surface Mounted Track (connection plates included)	White	
1.01.0259	Wall/Wall Connector (in) for Arcano Surface Mounted Track (connection plates included)	Black	
1.01.0260	Wall/Wall Connector (out) for Arcano Surface Mounted Track (connection plates included)	White	
1.01.0261	Wall/Wall Connector (out) for Arcano Surface Mounted Track (connection plates included)	Black	
1.01.0272	Flexible Track Connector	White	
1.01.0273	Flexible Track Connector	Black	
1.01.0270	End Cap	White	
1.01.0271	End Cap	Black	
1.01.0274	Suspension Kit for Arcano Surface Mounted Track (set of 2)	Nickel	1.5 meter
1.01.0275	Suspension Kit for Arcano Surface Mounted Track (set of 2)	Black	1.5 meter
1.01.0264	Track Cover	White	1 meter
1.01.0265	Track Cover	Black	1 meter
1.01.0266	Track Cover	White	2 meter
1.01.0267	Track Cover	Black	2 meter
1.01.0268	Track Cover	White	3 meter
1.01.0269	Track Cover	Black	3 meter


# Arcano

## SURFACE MOUNTED TRACK INSTALLATION

### Square installation

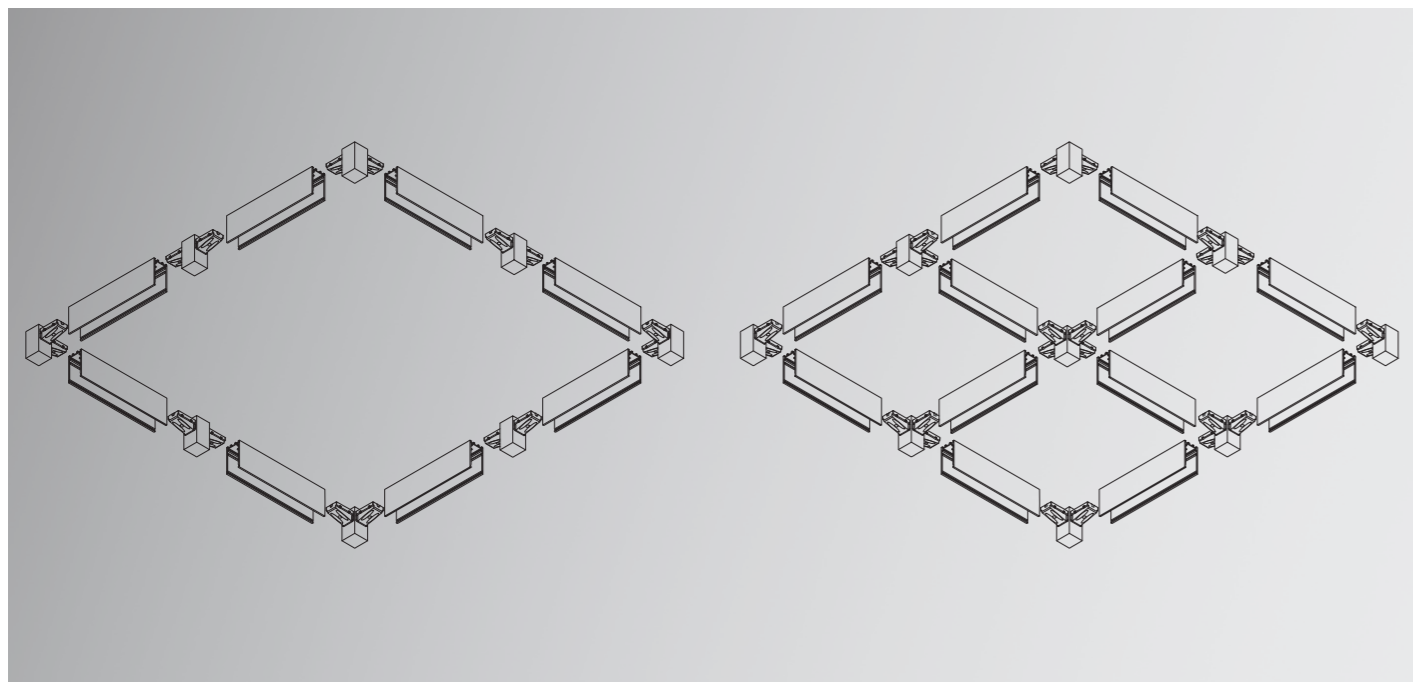

### Hexagonal installation

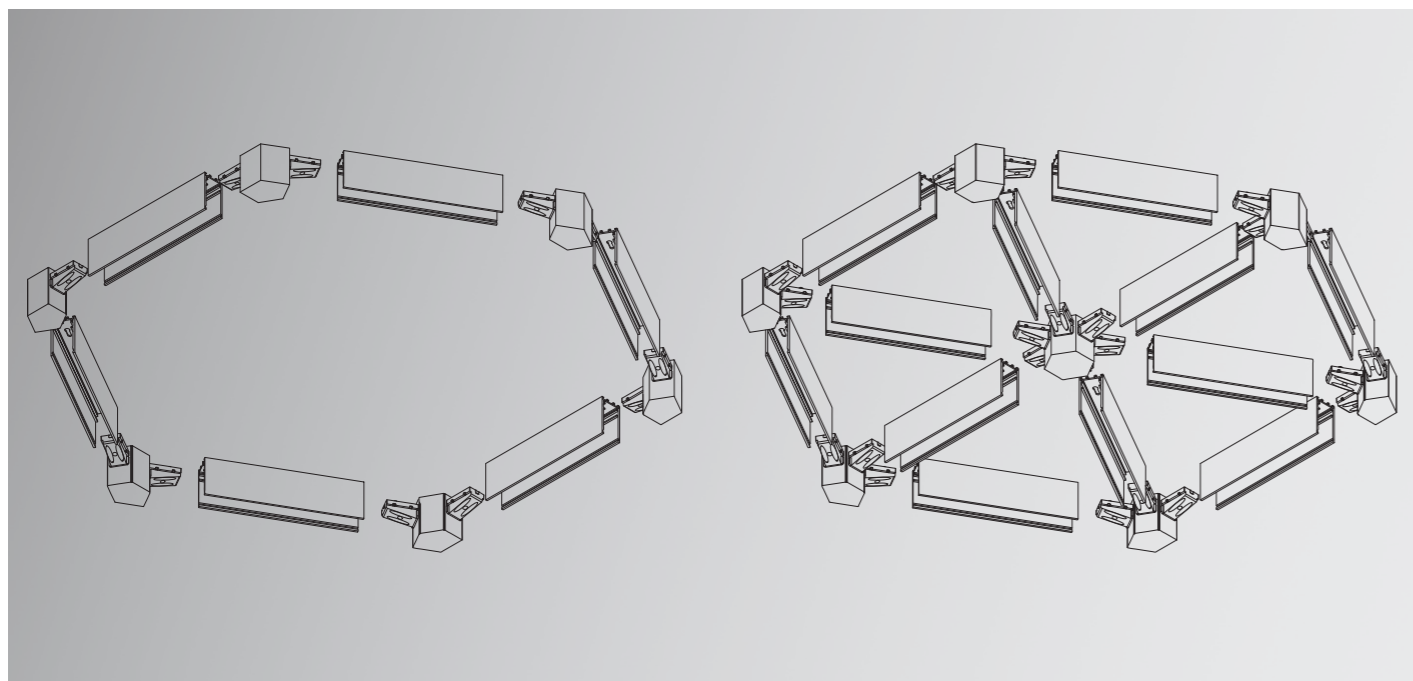

### Track Parts | Suitable for square installation



L-joint 90°



Connector



T-splitter  
(left / right)




X-joint

### Track Parts

Article No.	Product Name	Color	Article No.	Product Name	Color
1.01.0289	L-joint 90°	White	1.01.0303	T-splitter (right)	White
1.01.0290	L-joint 90°	Black	1.01.0304	T-splitter (right)	Black
1.01.0295	Connector	White	1.01.0297	X-joint	White
1.01.0296	Connector	Black	1.01.0298	X-joint	Black
1.01.0301	T-splitter (left)	White			
1.01.0302	T-splitter (left)	Black			

### Dimensions

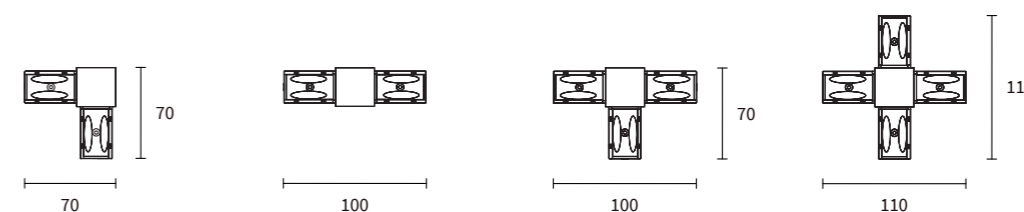

### Track Parts | Suitable for hexagonal installation



Corner Piece 2-fold



Connector



Corner Piece 3-fold




Center Piece

### Track Parts


Article No.	Product Name	Color	Article No.	Product Name	Color
1.01.0291	Corner Piece 2-fold	White	1.01.0293	Corner Piece 3-fold	White
1.01.0292	Corner Piece 2-fold	Black	1.01.0294	Corner Piece 3-fold	Black
1.01.0295	Connector	White	1.01.0299	Center Piece	White
1.01.0296	Connector	Black	1.01.0300	Center Piece	Black

### Dimensions

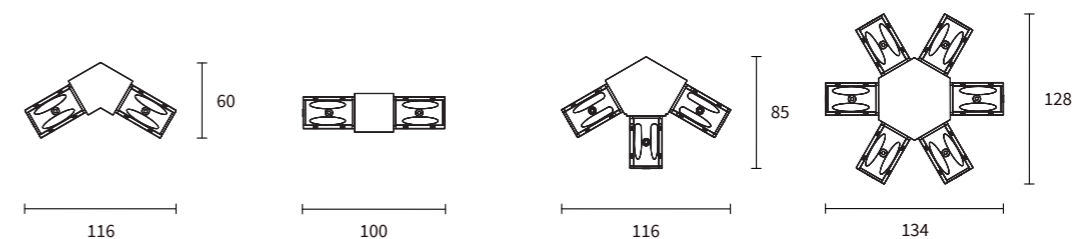




# Arcano RECESSED TRACK

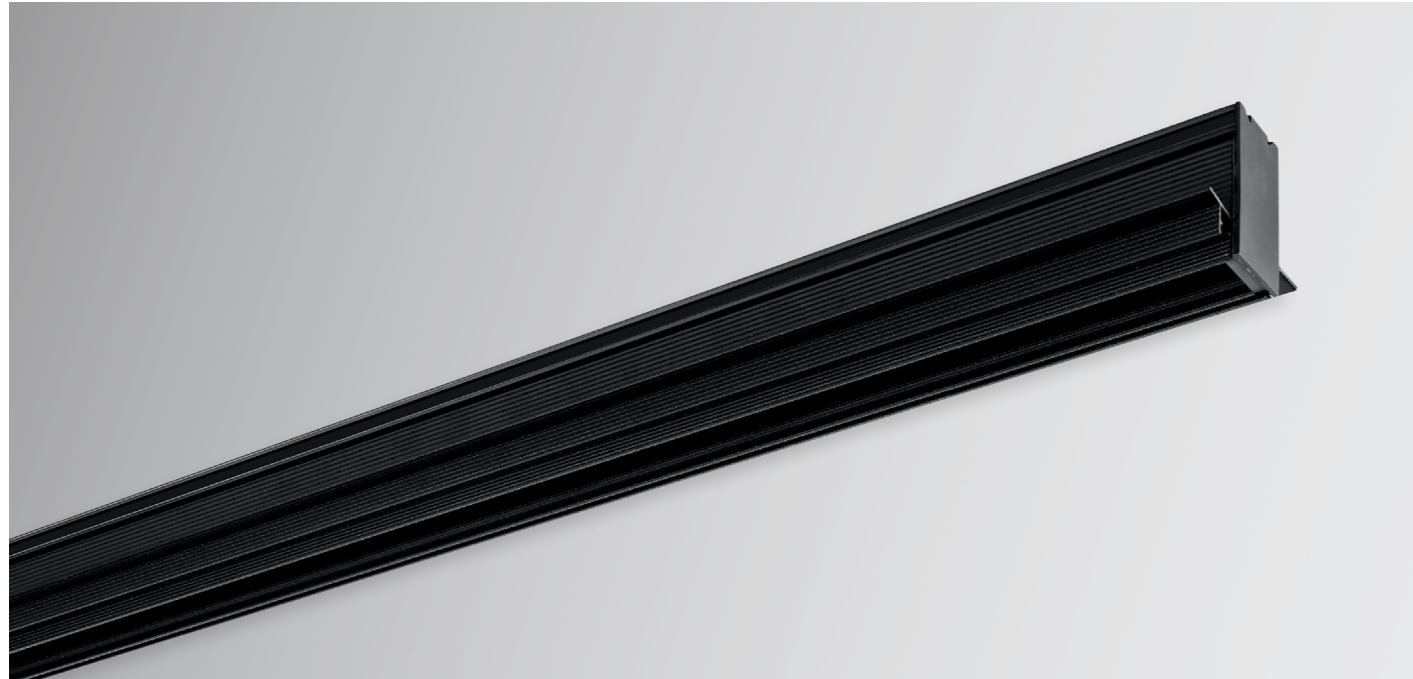


## Product information

Input voltage	DC48V
Max. load	up to 600W
Max. track length	up to 20m
Track sections	1m / 3m
Available color	White / Black
Certification	CE / ROHS

## Dimensions

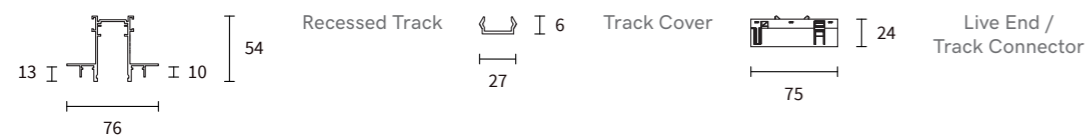

## Track accessories | Available for recessed track

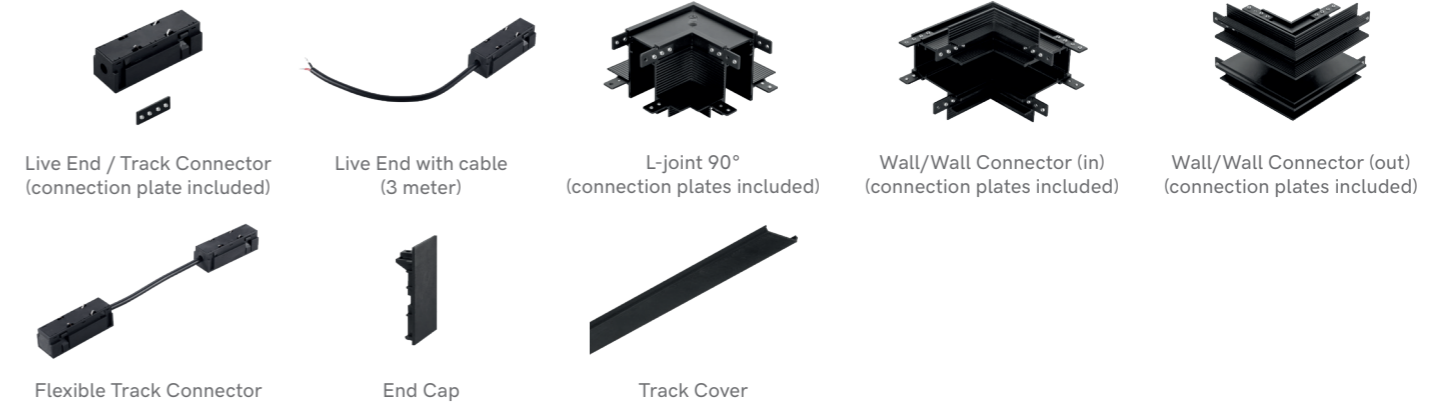

## Track


Article No.	Product Name	Color	Voltage	Length
1.09.0038	Arcano Recessed Track	White	DC48V	1 meter
1.09.0039	Arcano Recessed Track	Black	DC48V	1 meter
1.09.0040	Arcano Recessed Track	White	DC48V	2 meter
1.09.0041	Arcano Recessed Track	Black	DC48V	2 meter
1.09.0042	Arcano Recessed Track	White	DC48V	3 meter
1.09.0043	Arcano Recessed Track	Black	DC48V	3 meter

## Track Accessories

Article No.	Product Name	Color	Length
1.01.0262	Live End / Track Connector (connection plate included)	Black	
1.01.0263	Live End with cable	Black	3 meter
1.01.0277	L-joint 90° for Arcano Recessed Track	White	
1.01.0278	L-joint 90° for Arcano Recessed Track	Black	
1.01.0279	Wall/Wall Connector (in) for Arcano Recessed Track (connection plates included)	White	
1.01.0280	Wall/Wall Connector (in) for Arcano Recessed Track (connection plates included)	Black	
1.01.0281	Wall/Wall Connector (out) for Arcano Recessed Track (connection plates included)	White	
1.01.0282	Wall/Wall Connector (out) for Arcano Recessed Track (connection plates included)	Black	
1.01.0272	Flexible Track Connector	White	
1.01.0273	Flexible Track Connector	Black	
1.01.0270	End Cap	White	
1.01.0271	End Cap	Black	
1.01.0264	Track Cover	White	1 meter
1.01.0265	Track Cover	Black	1 meter
1.01.0266	Track Cover	White	2 meter
1.01.0267	Track Cover	Black	2 meter
1.01.0268	Track Cover	White	3 meter
1.01.0269	Track Cover	Black	3 meter

# Arcano

## ADJUSTABLE TRACK LIGHTS

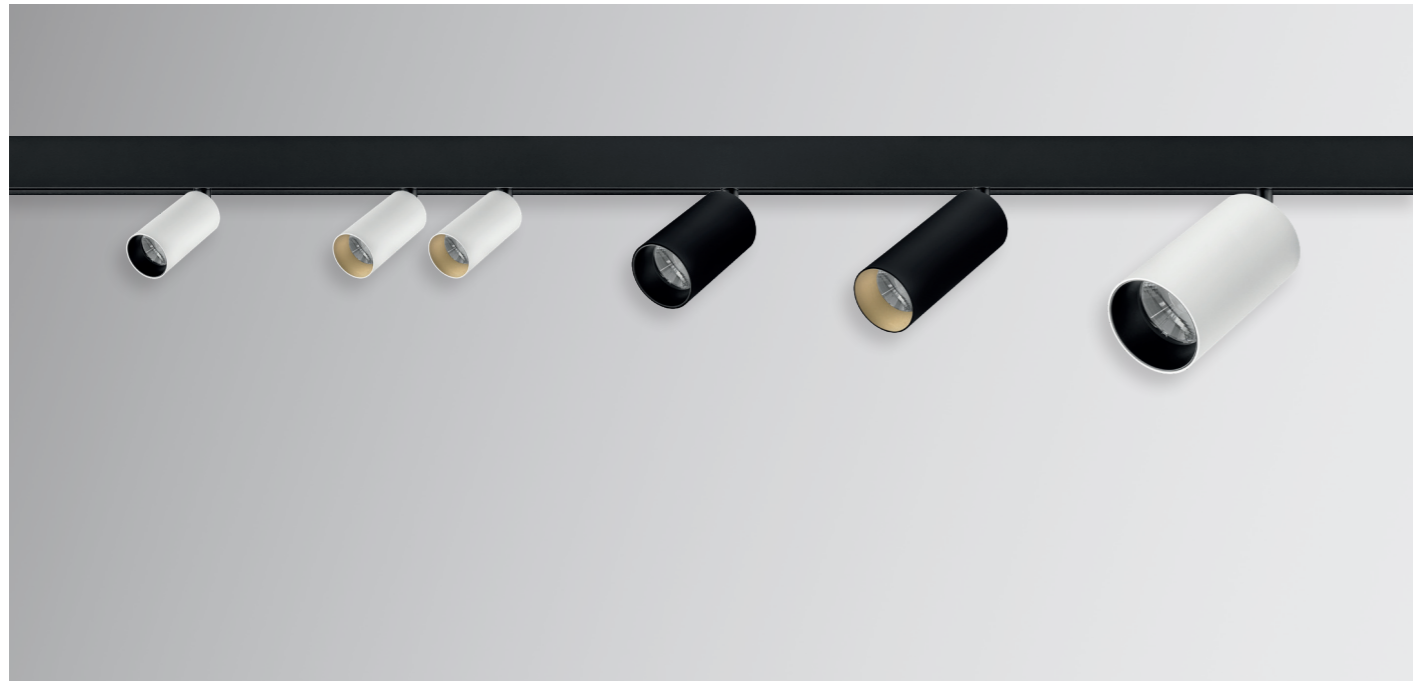


powered by  
**TRIDONIC**

### Product information

Input voltage	DC48V
Power	up to 30W
Lumen output	up to 2250lm
Efficiency	up to 64lm / W
CRI	>90Ra
Lens	30° for Ø30 (included) 30° for Ø52 / Ø75 (included)
CCT	2700K / 3000K
Available color	White / Black
Certification	CE / ROHS

### Dimensions

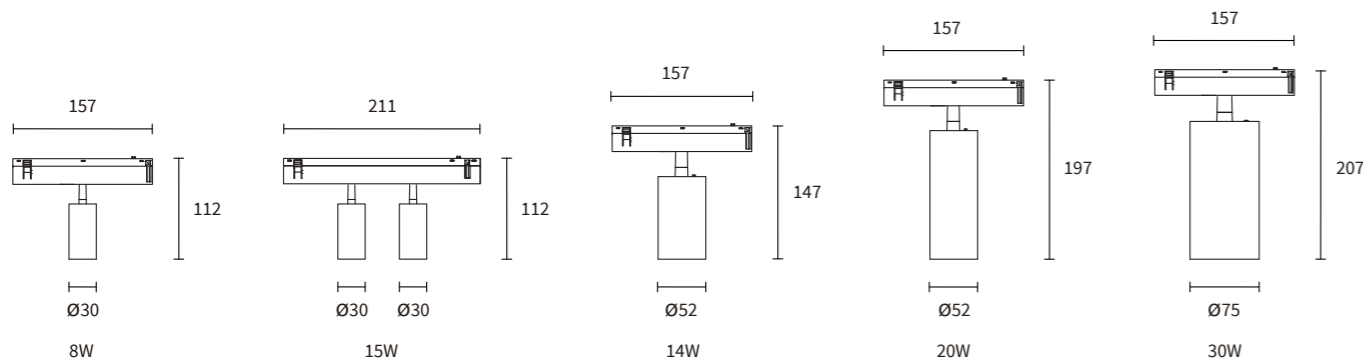

### Adjustable Track Lights

Article No.	Product Name	Diameter	Lumen	Housing Color	CCT	CRI	Cooling	Power	Lens
2.17.3015 / 2.17.3039*	Spotty Mini	Ø30 mm	401lm	White	2700K	>90Ra	Passive	8W	30°
2.17.3016 / 2.17.3040*	Spotty Mini	Ø30 mm	401lm	Black	2700K	>90Ra	Passive	8W	30°
2.17.3017 / 2.17.3041*	Spotty Mini	Ø30 mm	446lm	White	3000K	>90Ra	Passive	8W	30°
2.17.3018 / 2.17.3042*	Spotty Mini	Ø30 mm	446lm	Black	3000K	>90Ra	Passive	8W	30°
2.17.3031 / 2.17.3055*	Spotty Mini 2-Lights	Ø30 mm	750lm	White	2700K	>90Ra	Passive	15W	30°
2.17.3032 / 2.17.3056*	Spotty Mini 2-Lights	Ø30 mm	750lm	Black	2700K	>90Ra	Passive	15W	30°
2.17.3033 / 2.17.3057*	Spotty Mini 2-Lights	Ø30 mm	830lm	White	3000K	>90Ra	Passive	15W	30°
2.17.3034 / 2.17.3058*	Spotty Mini 2-Lights	Ø30 mm	830lm	Black	3000K	>90Ra	Passive	15W	30°
2.17.3019 / 2.17.3043*	Spotty Medium	Ø52 mm	782lm	White	2700K	>90Ra	Passive	14W	30°
2.17.3020 / 2.17.3044*	Spotty Medium	Ø52 mm	782lm	Black	2700K	>90Ra	Passive	14W	30°
2.17.3021 / 2.17.3045*	Spotty Medium	Ø52 mm	838lm	White	3000K	>90Ra	Passive	14W	30°
2.17.3022 / 2.17.3046*	Spotty Medium	Ø52 mm	838lm	Black	3000K	>90Ra	Passive	14W	30°
2.17.3023 / 2.17.3047*	Spotty Medium LH	Ø52 mm	1150lm	White	2700K	>90Ra	Passive	20W	30°
2.17.3024 / 2.17.3048*	Spotty Medium LH	Ø52 mm	1150lm	Black	2700K	>90Ra	Passive	20W	30°
2.17.3025 / 2.17.3049*	Spotty Medium LH	Ø52 mm	1236lm	White	3000K	>90Ra	Passive	20W	30°
2.17.3026 / 2.17.3050*	Spotty Medium LH	Ø52 mm	1236lm	Black	3000K	>90Ra	Passive	20W	30°
2.17.3029 / 2.17.3053*	Spotty Maxi	Ø75 mm	2250lm	White	3000K	>90Ra	Passive	30W	30°
2.17.3030 / 2.17.3054*	Spotty Maxi	Ø75 mm	2250lm	Black	3000K	>90Ra	Passive	30W	30°

Article No. with \* indicates that the luminaire is DALI Dimmable. Please use the DALI driver on page 35.

### Adjustable Track Lights Accessories

Article No.	Product Name	Article No.	Product Name
2.01.1084	Golden Inner Ring for Spotty Mini Ø30 mm	5.14.0246	Lens 50° for Spotty Mini Ø30 mm
2.01.1086	Golden Inner Ring for Spotty Medium Ø52 mm	5.14.0247	Lens 15° for Spotty Medium Ø52 mm
2.01.1088	Golden Inner Ring for Spotty Maxi Ø75 mm	5.14.0249	Lens 50° for Spotty Medium Ø52 mm
2.01.1152	Honeycomb Louvre for Spotty Medium Ø52 mm	5.14.0250	Lens 15° for Spotty Maxi Ø75 mm
2.01.1153	Honeycomb Louvre for Spotty Maxi Ø75 mm	5.14.0252	Lens 50° for Spotty Maxi Ø75 mm

### Track Lights Accessories

Available for Ø30 / Ø52 / Ø75 mm tracklights.




50° Lens  
for Ø30



15° / 50° Lens  
for Ø52 / Ø75



Honeycomb  
for Ø52 / Ø75



Golden Inner Ring  
for Ø30 / Ø52 / Ø75

# Arcano

## FIXED TRACK LIGHTS




powered by  
**TRIDONIC**

### Product information

Input voltage	DC48V
Power	4W
Lumen output	up to 265lm
Efficiency	up to 66lm / W
CRI	>90Ra
Lens	30° for Ø22 (included)
CCT	2700K / 3000K
Available color	White / Black
Certification	CE / ROHS

### Dimensions



Ø22 Ø22


### Fixed Track Lights

Article No.	Product Name	Diameter	Lumen	Housing Color	CCT	CRI	Cooling	Power	Lens
2.17.3035 / 2.17.3059*	Tuby Mini 2-Lights	Ø22 mm	265lm	White	2700K	>90Ra	Passive	4W	30°
2.17.3036 / 2.17.3060*	Tuby Mini 2-Lights	Ø22 mm	265lm	Black	2700K	>90Ra	Passive	4W	30°
2.17.3037 / 2.17.3061*	Tuby Mini 2-Lights	Ø22 mm	265lm	White	3000K	>90Ra	Passive	4W	30°
2.17.3038 / 2.17.3062*	Tuby Mini 2-Lights	Ø22 mm	265lm	Black	3000K	>90Ra	Passive	4W	30°

Article No. with \* indicates that the luminaire is DALI Dimmable. Please use the DALI driver on page 35.

# Arcano

## LINEAR LIGHT (LENS COVER)

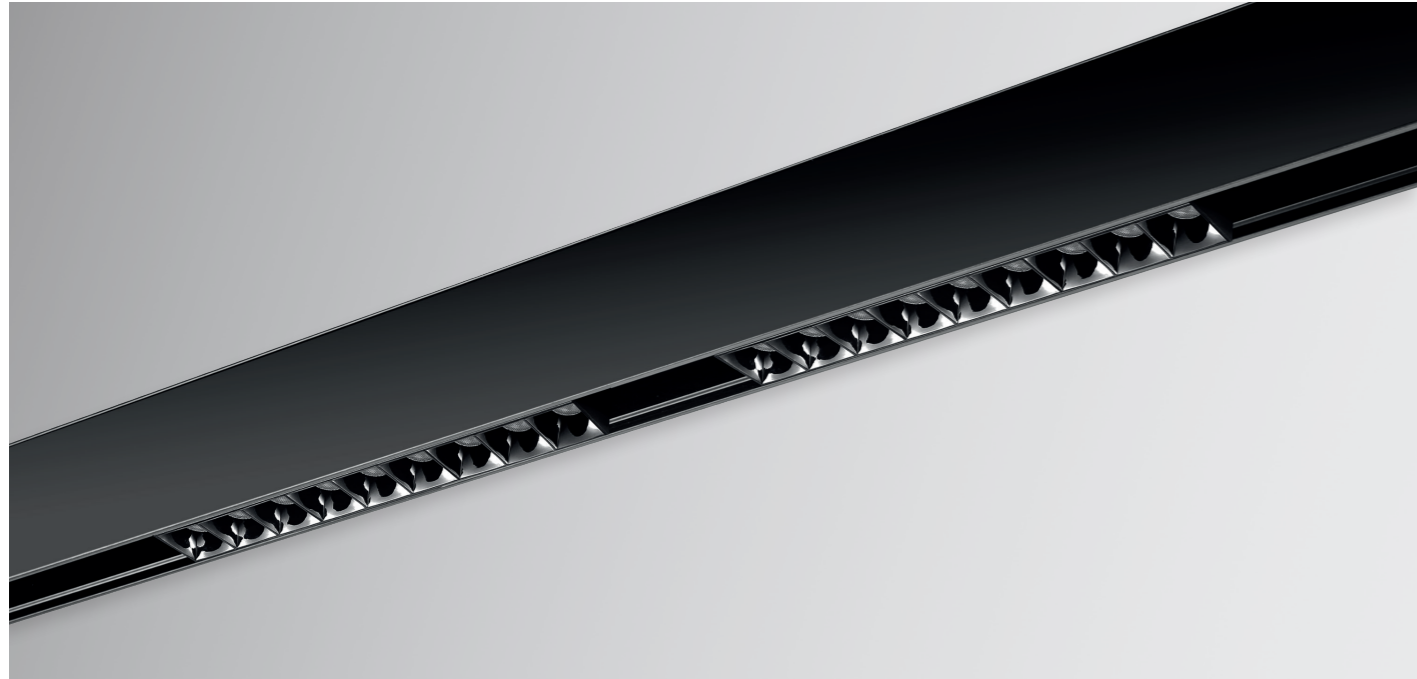


powered by  
**TRIDONIC**

### Product information

Input voltage	DC48V
Power	12W
Lumen output	up to 1047lm
Efficiency	up to 87lm / W
CRI	>90Ra
Lens	24°
CCT	2700K / 3000K
Available color	White / Black
Certification	CE / ROHS

### Linear Light (Lens Cover) | 12W

### Dimensions



### Linear Light (Lens Cover) | 12W

Article No.	Product Name	Lumen	Housing Color	CCT	CRI	Cooling	Power	Lens
2.17.3003 / 2.17.3009*	Arcano Linear Light 9-LED	948lm	Black	2700K	>90Ra	Passive	12W	24°
2.17.3004 / 2.17.3010*	Arcano Linear Light 9-LED	1047lm	Black	3000K	>90Ra	Passive	12W	24°

Article No. with \* indicates that the luminaire is DALI Dimmable. Please use the DALI driver on page 35.

# Arcano

## TILTABLE LINEAR LIGHT (LENS COVER)



powered by  
**TRIDONIC**

### Product information

Input voltage	DC48V
Power	11W
Lumen output	up to 1047lm
Efficiency	up to 87lm / W
CRI	>90Ra
Lens	24°
CCT	2700K / 3000K
Available color	White / Black
Certification	CE / ROHS


### Tilttable Linear Light (Lens Cover) | 11W

Article No.	Product Name	Lumen	Housing Color	CCT	CRI	Cooling	Power	Lens
2.17.3005 / 2.17.3011*	Arcano Linear Light 9-LED Tilttable	948lm	White	2700K	>90Ra	Passive	11W	24°
2.17.3006 / 2.17.3012*	Arcano Linear Light 9-LED Tilttable	948lm	Black	2700K	>90Ra	Passive	11W	24°
2.17.3007 / 2.17.3013*	Arcano Linear Light 9-LED Tilttable	1047lm	White	3000K	>90Ra	Passive	11W	24°
2.17.3008 / 2.17.3014*	Arcano Linear Light 9-LED Tilttable	1047lm	Black	3000K	>90Ra	Passive	11W	24°

Article No. with \* indicates that the luminaire is DALI Dimmable. Please use the DALI driver on page 35.


### Tilttable Linear Light (Lens Cover) | 11W

### Dimensions

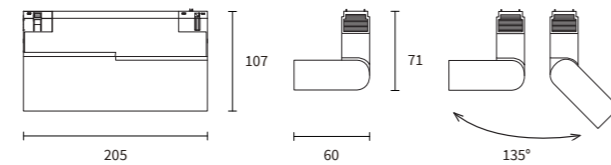

# Arcano

## LINEAR LIGHT (OPAL COVER)

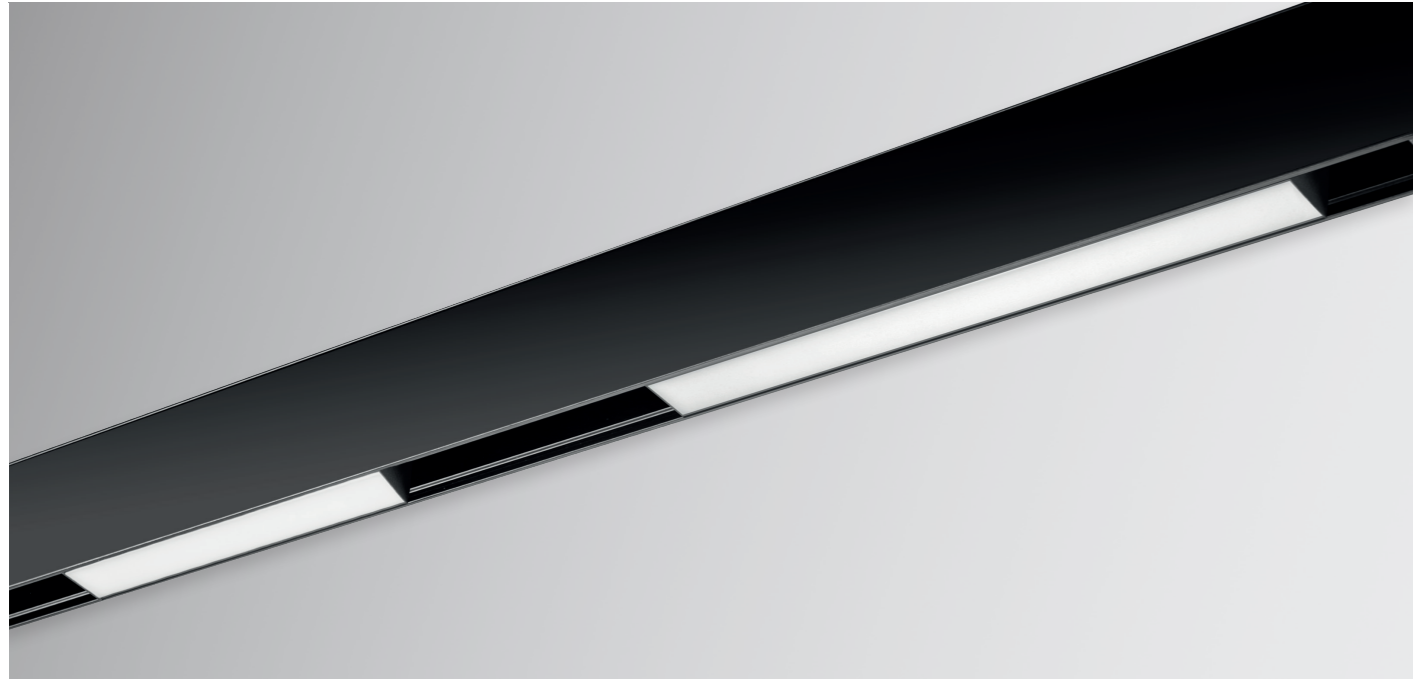

powered by  
**TRIDONIC**


### Product information

Input voltage	DC48V
Power	up to 18W
Lumen output	up to 1382lm
Efficiency	up to 77lm / W
CRI	>80Ra
Beam angle	110°
CCT	2700K / 3000K
Available color	Black
Certification	CE / ROHS

### Linear Light (Opal Cover) | 6W / 11W / 18W



### Dimensions

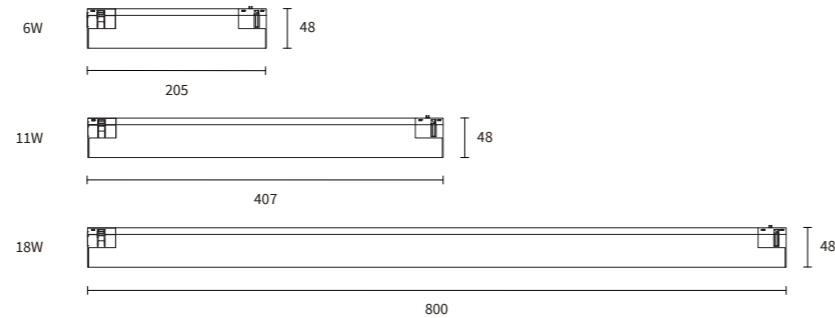

### Linear Light (Opal Cover)

Article No.	Product Name	Lumen	Housing Color	CCT	CRI	Cooling	Power	Cover
2.17.2991 / 2.17.2997*	Arcano Linear Light	375lm	Black	2700K	>80Ra	Passive	6W	Opal
2.17.2992 / 2.17.2998*	Arcano Linear Light	385lm	Black	3000K	>80Ra	Passive	6W	Opal
2.17.2993 / 2.17.2999*	Arcano Linear Light	676lm	Black	2700K	>80Ra	Passive	11W	Opal
2.17.2994 / 2.17.3000*	Arcano Linear Light	782lm	Black	3000K	>80Ra	Passive	11W	Opal
2.17.2995 / 2.17.3001*	Arcano Linear Light	1340lm	Black	2700K	>80Ra	Passive	18W	Opal
2.17.2996 / 2.17.3002*	Arcano Linear Light	1382lm	Black	3000K	>80Ra	Passive	18W	Opal

Article No. with \* indicates that the luminaire is DALI Dimmable. Please use the DALI driver on page 35.

# Arcano

## PENDANT TRACK LIGHTS




powered by  
**TRIDONIC**

### Product information

Input voltage	DC48V
Power	up to 19W
Lumen output	up to 1219lm
Efficiency	up to 64lm / W
CRI	>90Ra
Lens	30° for Ø30 (included) 30° for Ø52 (included)
CCT	2700K / 3000K
Available color	White / Black
Certification	CE / ROHS

### Dimensions

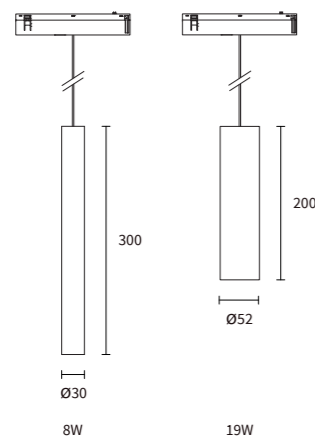

Cable: 2.5m included  
Cable can be shortened  
to desired length.

### Pendant Track Lights

Article No.	Product Name	Diameter	Lumen	Housing Color	CCT	CRI	Cooling	Power	Lens
2.06.0815 / 2.06.0831*	Arcano Pendant Track Mini LH	Ø30 mm	267lm	White	2700K	>90Ra	Passive	8W	30°
2.06.0816 / 2.06.0832*	Arcano Pendant Track Mini LH	Ø30 mm	267lm	Black	2700K	>90Ra	Passive	8W	30°
2.06.0817 / 2.06.0833*	Arcano Pendant Track Mini LH	Ø30 mm	312lm	White	3000K	>90Ra	Passive	8W	30°
2.06.0818 / 2.06.0834*	Arcano Pendant Track Mini LH	Ø30 mm	312lm	Black	3000K	>90Ra	Passive	8W	30°
2.06.0819 / 2.06.0835*	Arcano Pendant Track Medium	Ø52 mm	1134lm	White	2700K	>90Ra	Passive	19W	30°
2.06.0820 / 2.06.0836*	Arcano Pendant Track Medium	Ø52 mm	1134lm	Black	2700K	>90Ra	Passive	19W	30°
2.06.0821 / 2.06.0837*	Arcano Pendant Track Medium	Ø52 mm	1219lm	White	3000K	>90Ra	Passive	19W	30°
2.06.0822 / 2.06.0838*	Arcano Pendant Track Medium	Ø52 mm	1219lm	Black	3000K	>90Ra	Passive	19W	30°

Article No. with \* indicates that the luminaire is DALI Dimmable. Please use the DALI driver on page 35.

### Pendant Track Lights Accessories

Article No.	Product Name
2.01.1084	Golden Inner Ring for Arcano Pendant Track Mini LH Ø30 mm
2.01.1086	Golden Inner Ring for Arcano Pendant Track Medium Ø52 mm
5.14.0246	Lens 50° for Arcano Pendant Track Mini LH Ø30 mm
5.14.0247	Lens 15° for Arcano Pendant Track Medium Ø52 mm
5.14.0249	Lens 50° for Arcano Pendant Track Medium Ø52 mm


### Pendant Track Lights Accessories | Available for Ø30 / Ø52 Pendant Track Lights



50° Lens  
for Ø30



15° / 50° Lens  
for Ø52



Golden inner ring  
for Ø30 / Ø52

# Arcano

## PENDANT BALL TRACK LIGHT




powered by  
**TRIDONIC**

### Product information

Input voltage	DC48V
Power	28W
Lumen output	up to 2181lm
Efficiency	up to 78lm / W
CRI	>90Ra
Cover	Opal
CCT	2700K / 3000K
Available color	Black
Certification	CE / ROHS

### Dimensions

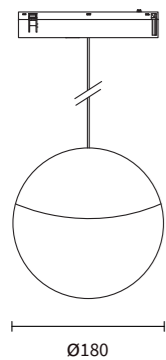

Cable: 2.5m  
Cable can be shortened  
to desired length.

Tiltable



### Pendant Ball Track Light

Article No.	Product Name	Diameter	Lumen	Housing Color	CCT	CRI	Cooling	Power	Cover
2.06.0800 / 2.06.0808*	Arcano Pendant Ball Track Light	Ø180 mm	2140lm	Black	2700K	>90Ra	Passive	28W	Opal
2.06.0802 / 2.06.0810*	Arcano Pendant Ball Track Light	Ø180 mm	2181lm	Black	3000K	>90Ra	Passive	28W	Opal

Article No. with \* indicates that the luminaire is DALI Dimmable. Please use the DALI driver on page 35.



# Arcano

## PENDANT LIGHTS



powered by  
**TRIDONIC**


### Product information

Input voltage	230V AC
Power	up to 19W
Lumen output	up to 1219lm
Efficiency	up to 64lm / W
CRI	>90Ra
Lens	30° for Ø30 (included) 30° for Ø52 (included)
CCT	2700K / 3000K
Available color	White / Black
Certification	CE / ROHS

### Product information


Input voltage	230V AC
Power	28W
Lumen output	up to 2181lm
Efficiency	up to 78lm / W
CRI	>90Ra
Cover	Opal
CCT	2700K / 3000K
Available color	Black
Certification	CE / ROHS

### Dimensions

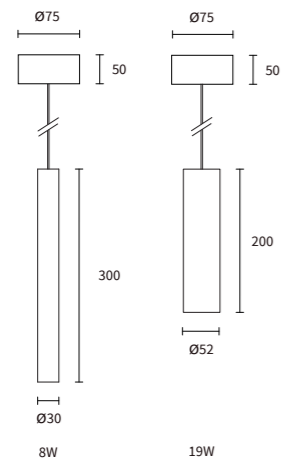

For DALI Dimmable version:  
Ø130mm ceiling cap

Cable: 2.5m  
Cable can be shortened  
to desired length.

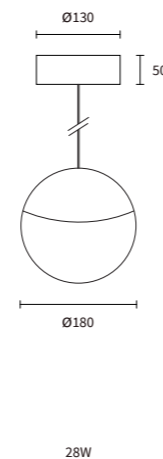

### Pendant Lights

Article No.	Product Name	Diameter	Lumen	Housing Color	CCT	CRI	Cooling	Power	Lens
2.06.0823 / 2.06.0839*	Arcano Pendant Mini LH	Ø30 mm	267lm	White	2700K	>90Ra	Passive	8W	30°
2.06.0824 / 2.06.0840*	Arcano Pendant Mini LH	Ø30 mm	267lm	Black	2700K	>90Ra	Passive	8W	30°
2.06.0825 / 2.06.0841*	Arcano Pendant Mini LH	Ø30 mm	312lm	White	3000K	>90Ra	Passive	8W	30°
2.06.0826 / 2.06.0842*	Arcano Pendant Mini LH	Ø30 mm	312lm	Black	3000K	>90Ra	Passive	8W	30°
2.06.0827 / 2.06.0843*	Arcano Pendant Medium	Ø52 mm	1134lm	White	2700K	>90Ra	Passive	19W	30°
2.06.0828 / 2.06.0844*	Arcano Pendant Medium	Ø52 mm	1134lm	Black	2700K	>90Ra	Passive	19W	30°
2.06.0829 / 2.06.0845*	Arcano Pendant Medium	Ø52 mm	1219lm	White	3000K	>90Ra	Passive	19W	30°
2.06.0830 / 2.06.0846*	Arcano Pendant Medium	Ø52 mm	1219lm	Black	3000K	>90Ra	Passive	19W	30°
2.06.0804 / 2.06.0812*	Arcano Pendant Ball Light	Ø180 mm	2140lm	Black	2700K	>90Ra	Passive	28W	Opal
2.06.0806 / 2.06.0814*	Arcano Pendant Ball Light	Ø180 mm	2181lm	Black	3000K	>90Ra	Passive	28W	Opal

Article No. with \* indicates that the luminaire is DALI Dimmable.

### Pendant Lights Accessories

Article No.	Product Name
2.01.1084	Golden Inner Ring for Arcano Pendant Mini LH Ø30
2.01.1086	Golden Inner Ring for Arcano Pendant Medium Ø52
5.14.0246	Lens 50° for Arcano Pendant Mini LH Ø30 mm
5.14.0247	Lens 15° for Arcano Pendant Medium Ø52 mm
5.14.0249	Lens 50° for Arcano Pendant Medium Ø52 mm


### Pendant Lights Accessories | Available for Ø30 / Ø52 Pendant Lights



50° Lens  
for Ø30



15° / 50° Lens  
for Ø52



Golden Inner Ring  
for Ø30 / Ø52

# Arcano

## IN-TRACK & REMOTE DRIVERS




### Product information

Input voltage	230V AC
Output voltage	48V DC
Power	Max. 600W (DALI max. 150W)
Available color	Black / Aluminium
Certification	CE / ROHS

### In-Track Driver (300 cm cable included) | 100W

### Dimensions

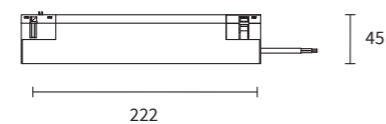


### Arcano In-Track-Driver

Article No.	Product Name	Input Voltage	Output Voltage	Output Power	Housing Color
3.10.0607	LED Driver CV Arcano 48V DC 100W Cable 300cm	230 AC	48V DC	Max. 100W	Black

### Remote Drivers (30cm cable included) | up to 600W

### Dimensions

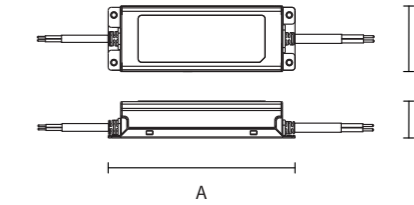


	A	B	C
75W	180	36	63
100W	199	36	63
150W	219	36	63
300W	246	40	77
480W	262	44	125
600W	280	49	144

### Arcano Remote-Drivers

Article No.	Product Name	Input Voltage	Output Voltage	Output Power	Housing Color
3.10.0608	LED Driver CV Arcano 48V DC 75W Cable 30cm	230 AC	48V DC	Max. 75W	Aluminium
3.10.0609	LED Driver CV Arcano 48V DC 100W Cable 30cm	230 AC	48V DC	Max. 100W	Aluminium
3.10.0610	LED Driver CV Arcano 48V DC 150W Cable 30cm	230 AC	48V DC	Max. 150W	Aluminium
3.10.0612	LED Driver CV Arcano 48V DC 300W Cable 30cm	230 AC	48V DC	Max. 300W	Aluminium
3.10.0613	LED Driver CV Arcano 48V DC 480W Cable 30cm	230 AC	48V DC	Max. 480W	Aluminium
3.10.0614	LED Driver CV Arcano 48V DC 600W Cable 30cm	230 AC	48V DC	Max. 600W	Aluminium

### DALI Dimmable Drivers | up to 150W

### Dimensions

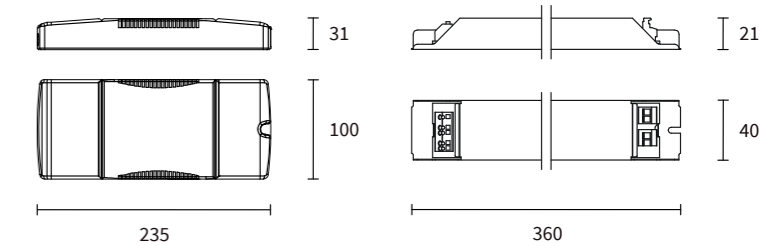

### Arcano DALI Dimmable -Drivers

Article No.	Product Name	Input Voltage	Output Voltage	Output Power	DALI Current Draw	Housing Color
3.10.0687	LED Driver CV Arcano LCU 48V DC 75W	230 AC	48V DC	Max. 75W	2mA	White
3.10.0688	LED Driver CV Arcano LCU 48V DC 150W	230 AC	48V DC	Max. 150W	2mA	White
3.10.0689*	LED Driver CV Arcano LCU Linear 48V DC 75W	230 AC	48V DC	Max. 75W	2mA	White
3.10.0690*	LED Driver CV Arcano LCU Linear 48V DC 150W	230 AC	48V DC	Max. 150W	2mA	White

Article No. with \* indicates an "open frame" without strain relief

### DALI Control Unit



- Rated voltage AC 230 V ~
- DALI Output current max. 52mA
- Number of DALI subscribers max. 26
- Max. number of DALI Control Units is 1 x 3.10.0708 and 3 x 3.10.0707



- DALI current draw 2mA
- Max. number of DALI Control Units is 1 x 3.10.0708 and 3 x 3.10.0707

### DALI Control Unit

Article No.	Product Name	Input Voltage	Output Current
3.10.0708	DALI Control Unit with intergrated DALI Power Supply	230 AC	Max. 52mA
3.10.0707*	DALI Control Unit	230 AC	-

Article No. with \* in combination with 3.10.0708 as second control unit

Credits  
VISUALS imore.  
GRAPHIC DESIGN Studio Anouk Stoffels

Nijverheidsweg 2  
2421LR Nieuwkoop  
+31 (0)172 574500  
info@nuudo.com  
www.nuudo.com

nuudo. is part of the Lumiparts Group